



## Babele Owner's Manual

# GOLD NOTE

The Renaissance of Technology.

Thank you for your purchase of the BABELE MM stereo cartridge.  
Read these Operating Instructions carefully before using your BABELE MM and keep it for future reference.

### Before Using

1. The Stylus is very delicate. Applying excessive force to the stylus, such as pressing with a finger can break it. Handle the cartridge with the utmost care.
2. A powerful magnet is used in the cartridge. Note that carelessly bringing a steel screwdriver or other such item near the cartridge will result in it being attracted by the magnet and may result in damage to the stylus, so care must be taken. Be sure to use the stylus cover when mounting the cartridge in the head shell, or when otherwise handling the cartridge.

### Package Content

- Cartridge body with stylus cover
- Stainless steel no-magnetic head-shell fixing 2,5mm screws
- Owner's Manual

### Method of Use

1. Mounting the cartridge on the tone arm Head-Shell using the supplied 2,5mm screws and adjust it to the stylus position specified for the turntable system you are using mounting it properly without tilting or turning it. (See Figure 1.)

- The output terminals are colours coded for identification as illustrated in Figure 2. Match the colors of the tone arm head-shell leads to the terminals and connect each other properly.

### NOTE:

When connecting the cartridge, be sure to use the tipped leads and press them onto the terminals. Applying heat to the output terminals of the cartridge, such as in direct soldering, will cause internal damage to the cartridge, such as wire breakage.

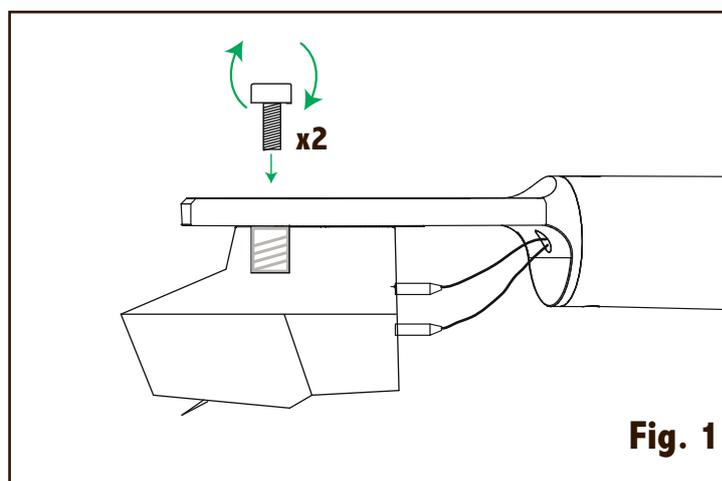


Fig. 1

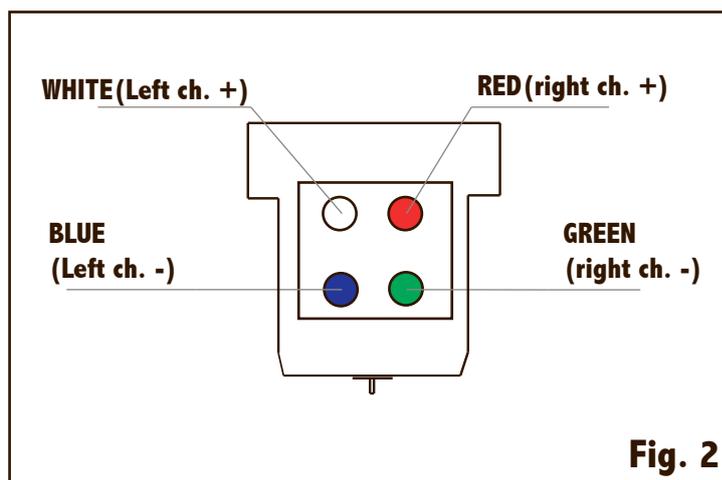



Fig. 2

Though the **Babele MM** is the Gold Note entry level MM cartridge that anyway features a body carefully dampened to absorb vibrations enabling high quality audio performance.

The Babele MM conveniently has two brass threaded inserts helping the installation also allowing a perfect solid arm head-shell blocking.

The 3.0mV gain output together with 470ohm internal impedance allows the Babele MM to be conveniently driven easily by any kind of MM phono preamplifier.

Please Note: to preserve the uniqueness all the new Babele MM cartridges have the serial number indelibly engraved on the cartridge body.

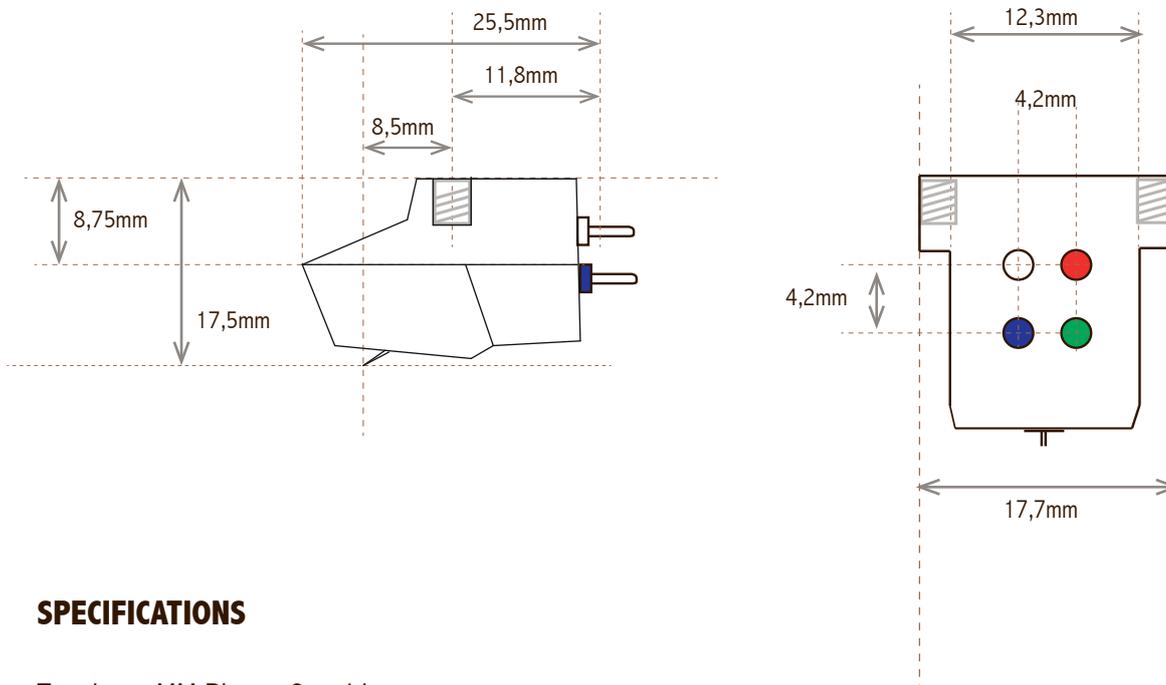

## SPECIFICATIONS

Typology: MM Phono Cartridge

Output level: 3.0mV

Frequency response: 20-20000Hz

Impedance: 400ohm

Suggested load: 47Kohm

Compliance:  $15 \times 10^{-6}$ cm/dyne

Channel separation: >20dB

Suggested tracking weight: 1.5 to 2.0g

Cantilever: aluminium

Diamond: Elliptical shape

Mounting hole diamond distance: 8,5mm

## Physical

Total weight: 6g

**GOLD NOTE**  
The Renaissance of Technology.

Via della Gora, 6  
Montespertoli (Florence) Italy 50025  
Tel. + 39 0571 675005  
Fax. + 39 0571 675013  
[www.goldnote.it](http://www.goldnote.it)