



Bobolino Red Owner's Manual

GOLD NOTE

The Renaissance of Technology.

Thank you for your purchase of the BOBOLINO RED stereo cartridge.

Read these Operating Instructions carefully before using your BOBOLINO RED and keep it for future reference.

Before Using

1. The Stylus is very delicate. Applying excessive force to the stylus, such as pressing with a finger can break it. Handle the cartridge with the utmost care.
2. A powerful magnet is used in the cartridge. Note that carelessly bringing a steel screwdriver or other such item near the cartridge will result in it being attracted by the magnet and may result in damage to the stylus, so care must be taken.

Package Content

- Cartridge body
- Stainless Steel no-magnetic two sets of head-shell fixing 2,5mm screws
- 2mm Allen Wrench
- Owner's Manual

Method of Use

1. Mounting the cartridge on the tone arm Head-Shell using the supplied Allen Wrench and one set of the 2,5mm screws. Adjust it to the stylus position specified for the turntable system you are using mounting it properly without tilting or turning it. (See Figure 1.)

- The output terminals are colours coded for identification as illustrated in Figure 2. Match the colors of the tone arm head-shell leads to the terminals and connect each other properly.

NOTE:

When connecting the cartridge, be sure to use the tipped leads and press them onto the terminals. Applying heat to the output terminals of the cartridge, such as in direct soldering, will cause internal damage to the cartridge, such as wire breakage.

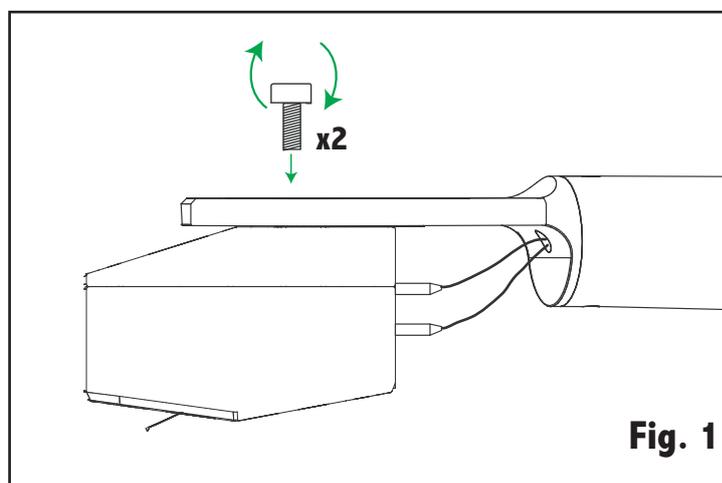


Fig. 1

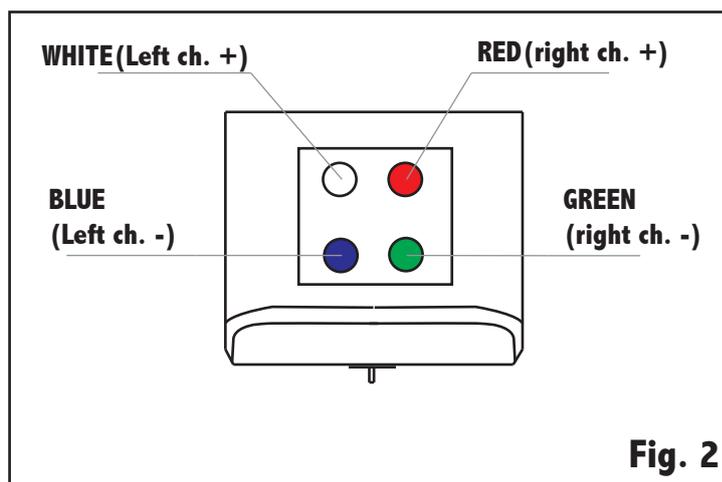


Fig. 2

The **Bobolino Red** is the new high mass Aluminum/Delrin body DIM phono cartridge features high internal impedance and high gain to achieve great sound performance matched with any MM phono preamplifier.


The Bobolino Red aluminum alloy light and rigid cantilever handles a high precision Elliptical diamond for perfect structural rigidity.

The cantilever suspension is made by a double elastic polymer inserted into a brass pipe to eliminate vibrations enhancing the best tracking ability.

Besides, the increased lighted dampened body of the cartridge, featuring only 9gram mass enables a superb vibration control.

Due to its 600ohm high internal impedance and 3.0mV output level the Bobolino Red can be easily matched with any active phono preamp MM at 47k Ω

Please Note: to preserve the uniqueness all Bobolino Red cartridges have the serial number indelibly engraved on the cartridge body.

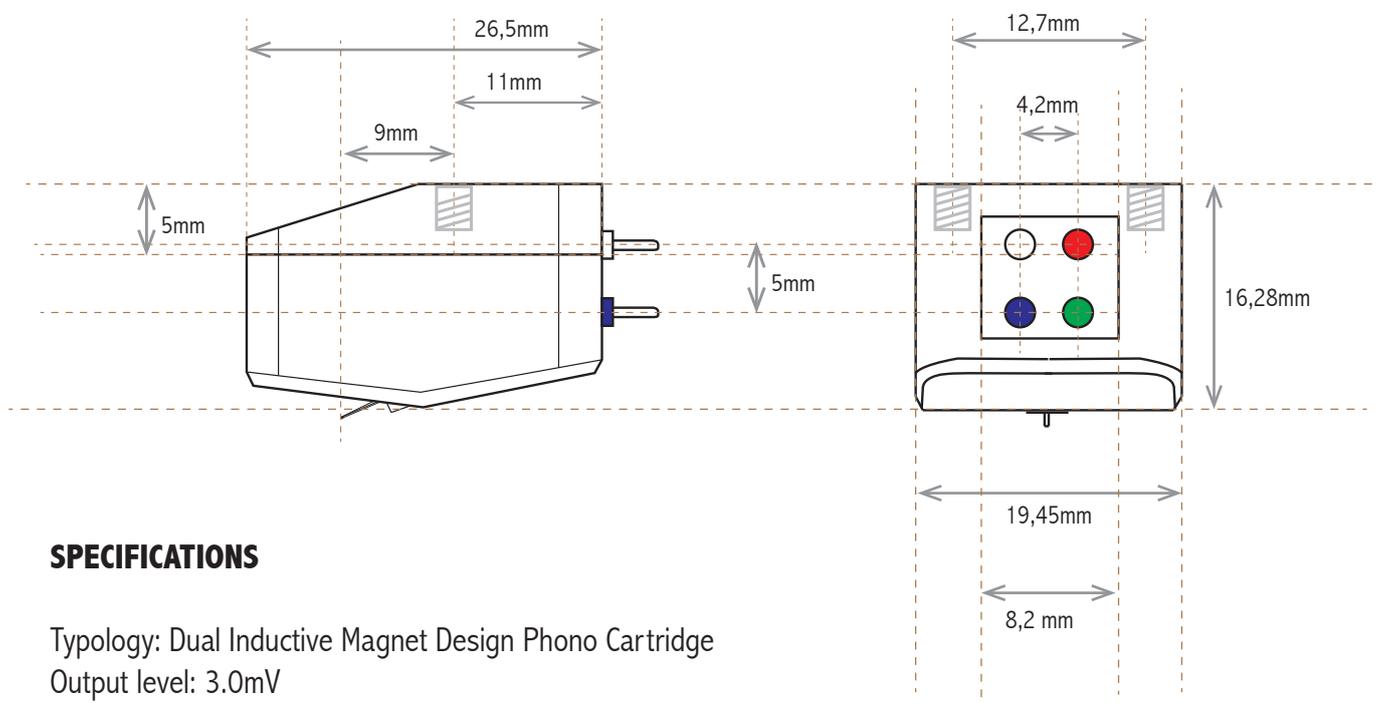

SPECIFICATIONS

Typology: Dual Inductive Magnet Design Phono Cartridge

Output level: 3.0mV

Frequency response: 20-30000Hz

Impedance: 600 Ω

Suggested load: 47K Ω

Compliance: 15 \times 10⁻⁶cm/dyne

Channel separation: >25dB

Suggested tracking weight: 1.5 to 1.8g

Cantilever: Aluminum

Diamond: Elliptical

Coil Wire: Copper

Mounting hole diamond distance: 9mm

Physical

Total weight: 9g

GOLD NOTE
The Renaissance of Technology.

Via della Gora, 6
Montespertoli (Florence) Italy 50025
Tel. + 39 0571 675005
Fax. + 39 0571 675013
www.goldnote.it